



**SOLUBLE
SALT
TILES**

600x600 MM




**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8000



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

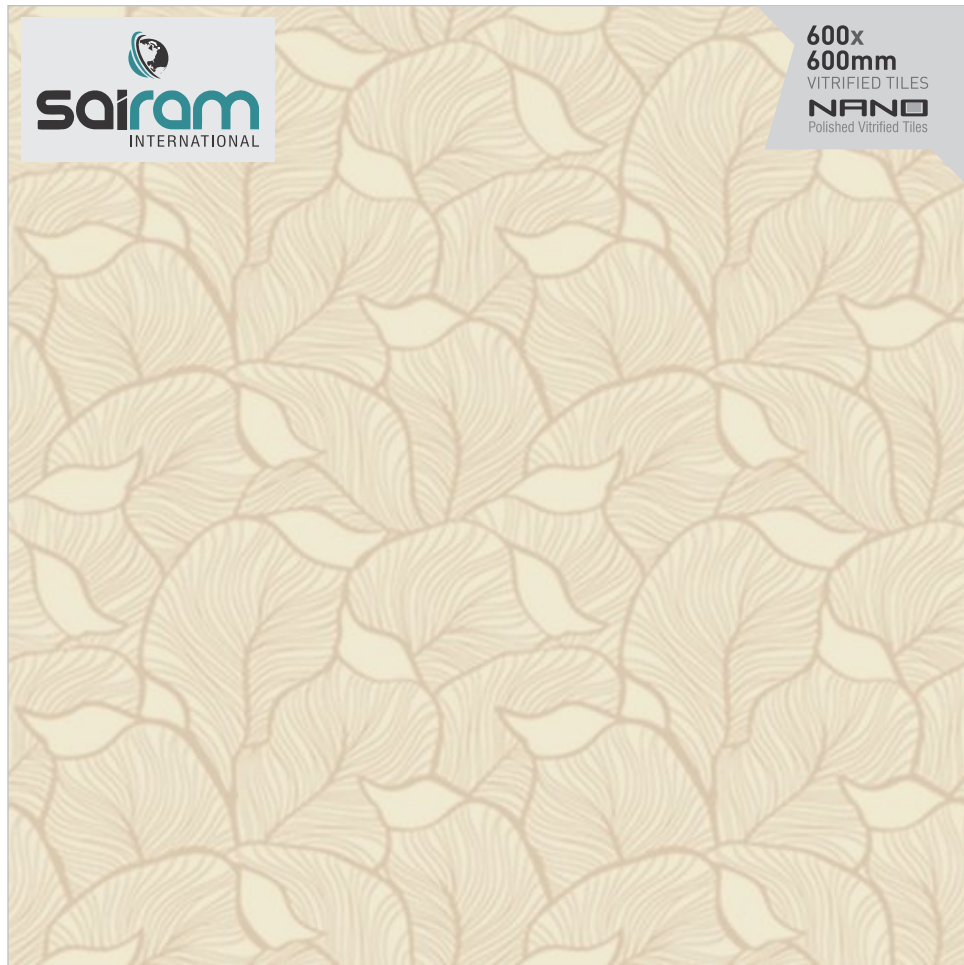

8001



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8002



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8003



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles



8005



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8007



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8008



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles



8009



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8010



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8011



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8012



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8013



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles



8014



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8015



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8016



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8017



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8018



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles



8020



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8021



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8022



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8023



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8024



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles



8025



8026



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8027



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8030



**600x
600mm**
VITRIFIED TILES
NANO
Polished Vitrified Tiles

8031

QUALITY STANDARD REFERENCE TABLE

No.	PROPERTY	INTERNATIONAL STANDARD	OUR VALUE	METHOD OF TESTING
1.	Deviation in Length	$\pm 0.5\%$	$\pm 0.1\%$	ISO-10545-2
2.	Deviation in Thickness	$\pm 5.0\%$	$\pm 3.0\%$	ISO-10545-2
3.	Straightness of Sides	$\pm 0.5\%$	$\pm 0.3\%$	ISO-10545-2
4.	Rectangularity	$\pm 0.5\%$	$\pm 0.1\%$	ISO-10545-2
5.	Surface Flatness	$\pm 0.5\%$	$\pm 0.1\%$	ISO-10545-2
6.	Water Absorption*	$< 0.5\%$	$< 0.05\%$	ISO-10545-2
7.	Mohs Hardness*	$> \text{MIN } 6$	> 8	EN 101
8.	Glossiness	As per Mfg.	90% (Nano Only)	Glossmeter
9.	Flexural Modulus Of Rupture	Min. 35 N/mm ²	Min. 40 N/mm ²	ISO-10545-4
10.	Flexural Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
11.	Apprent Density	$> 2.0 \text{ gm/ cc}$	$> 2.28 \text{ gm/ cc}$	DIN 51082
12.	Frost Resistance	Frost Proff	Frost Proff	ISO-10545-12
13.	Thermal Expansion	$< 9 \times 10^{-6}$	$< 6.5 \times 10^{-6}$	ISO-10545-8
14.	Thermal Shock Resistance	No Damage	No Damage	ISO-10545-9
15.	Chemical Resistanc	No Damage	No Damage	ISO-10545-13
16.	Stain Resistance	Resistance	Resistance	ISO-10545-14
17.	Moisture Expansion	Nil	Nil	ISO-10545-10

Note : Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice.



ANTI-FROST



SELF-HEALING
REPAIRS



CLEAN
RESISTANT



STRENGTH
ENHANCER



ANTI-SLIP

HIGHTECH
nano
POLISH VITRIFIED TILES